



Experience Innovation

Model: 6" Utility Trash/Sewage Pump

Name: 6TS

The Thompson trash/sewage pump with self-priming centrifugal pump end is ideal for construction dewatering and sewer bypass applications. Specified for handling large solids and/or abrasive material at high heads, the 6TS outperforms other centrifugal trash pumps on the market and costs less to operate. The quality and dependability engineered into each Thompson heavy-duty trash pump provides the high performance needed to get the job done efficiently and effectively.



Photo shown may not be exact model.

Consult factory for options.

Pump End Materials	
Pump Casing	Heavy-duty class 30 cast-iron with built-in volute.
Impeller	Dynamically balanced, two-vane, non-clogging, semi-open with full rear shroud, ductile iron, with rear-equalizing vanes to reduce axial loading and prolong seal and bearing life. Diameter 11.25".
Mechanical Seal	Grease or oil lubricated with Tungsten Carbide rotating and stationary seal faces.
Head	Rugged, back pull out design, heavy-duty class 30 cast iron with tapered bore design.
Bearings & Frame	Heavy-duty grease lubricated to carry both axial and radial loads. Frame, heavy-duty class 30 cast iron.
Shaft	Carbon steel and fitted with a 304 stainless steel shaft sleeve
Suction Check Valve	Built-in weighted, full-flow valve to eliminate re-priming with each cycle.
Wear Plate	Replaceable, class 30 cast iron with abrasion resistant rubber facing to extend service life.

Technical Specifications			
Suction Size	6 in (15.24 cm)	Approximate Dry Weight	3,520 lbs (1,596 kg)
Discharge Size	6 in (15.24 cm)	Best Efficiency	N/A
Maximum Solids Handling	3 in (7.62 cm)	Maximum Operating Speed	2,200 rpm
Maximum Operating Temperature	200° F (93.33° C)	Maximum Operating Pressure	64.9 psi (447.71 kPa)



Fuel Tank Options		Kohler Max Run Time	
Integral	54 Gal	17 Hours	
Modular (M)	100 Gal	32 Hours	

*Consult factory for fuel tank sizes not listed above.

Thompson Pump and Manufacturing Co., Inc.
4620 City Center Drive, Port Orange, FL 32129 USA
www.thompsonpump.com

Nationwide 800-767-7310 • International +1-386-767-7310
sales@thompsonpump.com

Jun-20

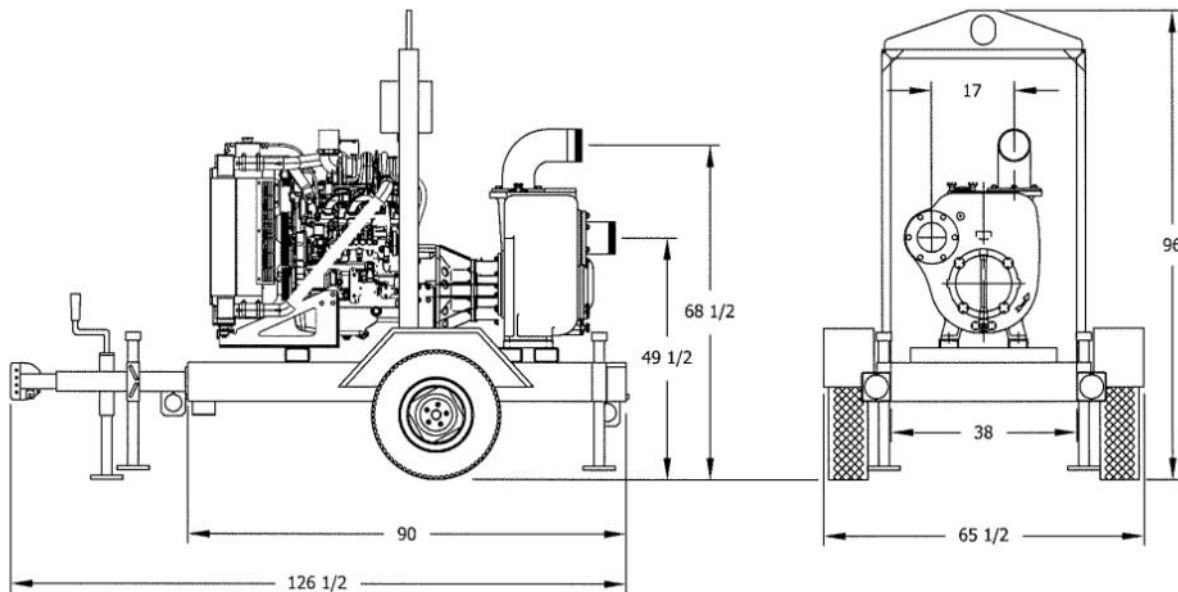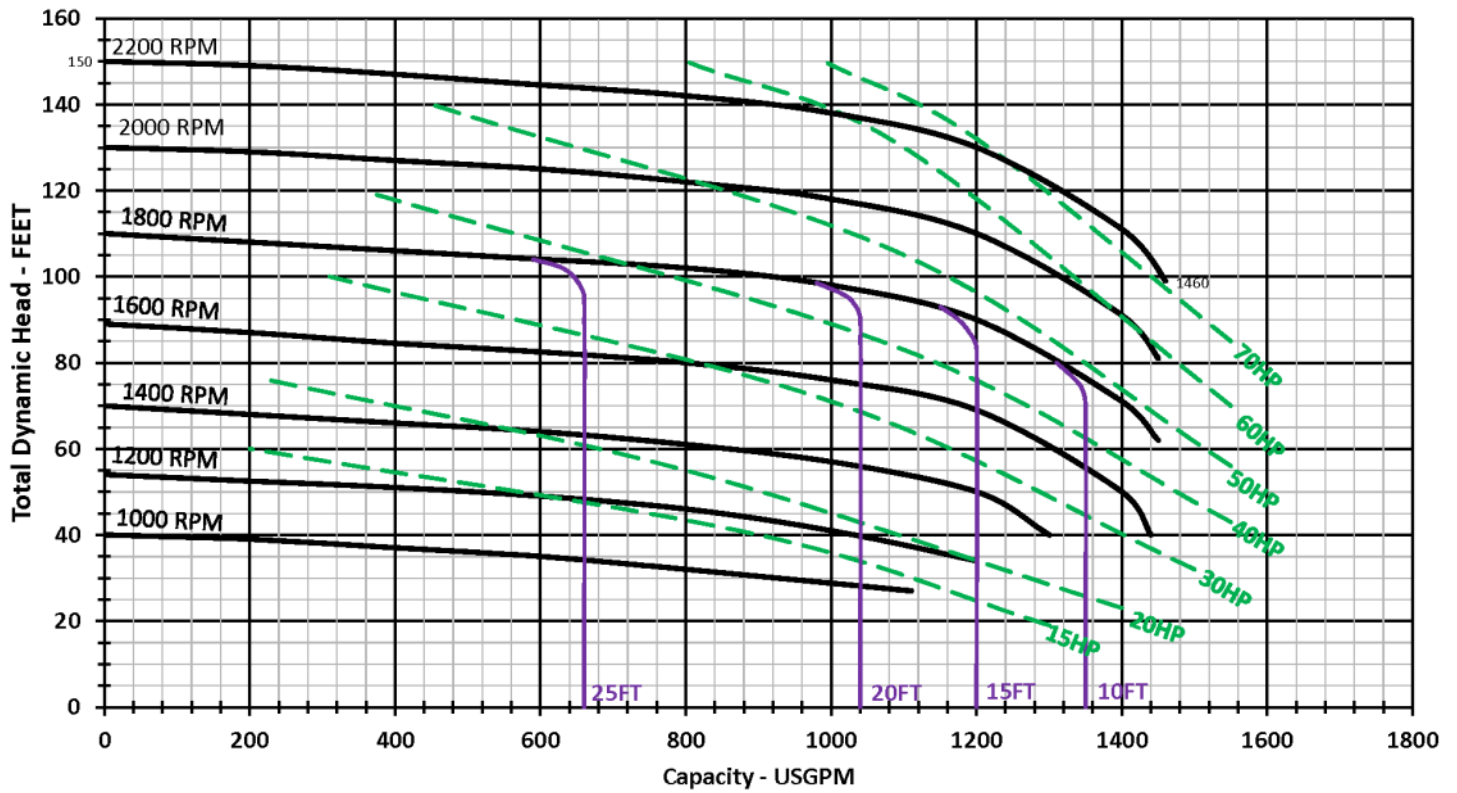

Kohler CK25KDI—74 hp @ 2,400 rpm

Typical Operating Speed	2,200 rpm	Engine Speed	Fuel Economy	Run Time*
Maximum Head	150 ft (45.72 m)	2,200 rpm	0.353 lb/hp-hr	13 hrs
Maximum Flow Capacity	1,460 gpm (331.42 m ³ /hr)	2,000 rpm	0.350 lb/hp-hr	15 hrs
Maximum Fuel Consumption	4.03 gph (15.26 L/hr)	1,800 rpm	0.345 lb/hp-hr	17 hrs

*Engine run times calculated based on a 54 gallon fuel tank.

Specifications and illustrations are subject to revision without notice and without incurring any obligation for previous or subsequent equipment sold. Thompson Pump (ISO 9001:2015) makes no representation regarding the completeness or accuracy of this information and is not liable for any direct or indirect damages arising from or relating to this information or its use. Capacity & Head are shown for comparative purposes. Consult Thompson factory for exact capabilities.